

## Storm 8 LED Series

### Design LSC8 Wall Sconce

25 Watt, 50 Watt or 90 Watt Super Bright White LED  
Up To 150,000 Hour Average Rated Life

#### THINK GREEN WITH LED LIGHTING

LED's (Light Emitting Diodes) are more efficient than traditional H.I.D. (High Intensity Discharge) light sources consuming as much as 75% less energy.

H.I.D. Light sources (Metal Halide and High Pressure Sodium) are rated at 10,000 to 20,000 hours useful life. LED's are rated up to 80,000 hours providing much lower maintenance costs.

LED fixtures providing better energy efficiency and a better quality of useable light.



#### Specifications

**Housing:** Heavy duty cast aluminum with quick mount system. Powder coated finish. See finish note.

**Lens:** Clear tempered glass silicone sealed to door frame. Door frame gasketed to housing and secured with stainless steel captive tamper proof screws.

**Reflector:** Anodized aluminum, computer designed with LED array for efficiency and wide distribution **classified full cut-off dark sky compliant.**

**Light Source:** Super bright white 25W, 50W or 90W LED array with cast aluminum heat sink 3500K or 4900K color temp. 120V—277V LED driver.


**Lumens:** Initial lumen values of LEDs vary depending on brand and color temperature of the LEDs. Consult factory for information.

**Finish:** Bronze, detergent cleaned, prime coated chip resistant powder urethane polyester coating. Contact factory for other colors.

**Photometric Information:** Contact factory.

**Labels:** U/L, CUL listed suitable for wet location.

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

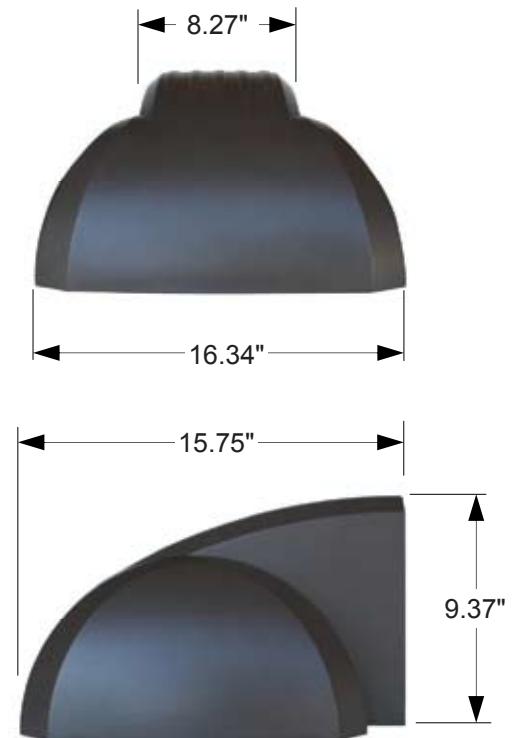

#### Ordering Information

Catalog Number	Watts	Light Source
LSC825	25	Super Bright LED
LSC850	50	Super Bright LED
LSC890	90	Super Bright LED

# Storm 8 LED Series

## Design LSC8 Wall Sconce

25 Watt, 50 Watt or 90 Watt Super Bright White LED  
Up To 150,000 Hour Average Rated Life

### Mounting System




**Storm 8 Quick Mount System**



Mounting bracket & bubble level device.



1. Level bracket and install on wall.

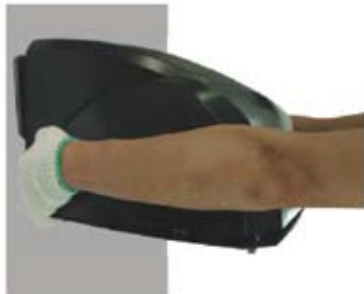

2. Hook fixture housing to mounting bracket.



3. Tighten the mounting bracket to the fixture from the inside.



4. Close the door frame and secure the door frame screws.

5 Position adjustable reflector tilt puts the light where it's needed.

