

The Stealth LED Series

Design PM860 Arm Mount Luminaire

25 Watt, 50 Watt or 90 Watt Super Bright White LED
With Clear Tempered Glass Lens
Up To 150,000 Hour Average Rated Life

THINK GREEN WITH LED LIGHTING

LED's (Light Emitting Diodes) are more efficient than traditional H.I.D. (High Intensity Discharge) light sources consuming as much as 75% less energy.

H.I.D. Light sources (Metal Halide and High Pressure Sodium) are rated at 10,000 to 20,000 hours useful life. LED's are rated up to 80,000 hours providing much lower maintenance costs.

LED fixtures providing better energy efficiency and a better quality of useable light.



Specifications

Housing: Heavy duty die-cast aluminum housing and lens frame. Lens frame sealed to housing with silicone gasket. See finish note.

Lens: Clear tempered high impact flat glass sealed to lens frame.

Reflector: Anodized aluminum, computer designed with LED array for efficiency and wide low glare Type V distribution.

Light Source: Super bright white 25W, 50W or 90W LED array with cast aluminum heat sink 3500K or 4900K color temp. 120V—277V LED driver.



Finish: Bronze, detergent cleaned, prime coated chip resistant powder urethane polyester coating. Contact factory for other colors.

Photometric Information: Contact factory.

Labels: U/L, CUL listed suitable for wet location.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Dimensions

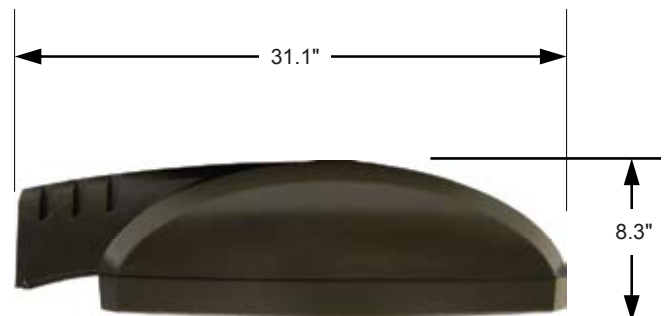

PM860RP Round Pole Adapter

The Stealth LED Series
Design PM860 Arm Mount Luminaire
25 Watt, 50 Watt or 90 Watt Super Bright White LED
With Clear Tempered Glass Lens
Up To 150,000 Hour Average Rated Life

Ordering Information

Catalog Number	Watts	Light Source
6" Extruded Aluminum Arm		
PM86025L	25	Super Bright LED
PM86050L	50	Super Bright LED
PM86090L	90	Super Bright LED