

## Vega LED Series

### Design QV Arm Mount Luminaire

25 Watt, 50 Watt or 90 Watt Super Bright White LED  
With Prismatic Borosilicate Glass Lens  
Up To 150,000 Hour Average Rated Life

#### THINK GREEN WITH LED LIGHTING

LED's (Light Emitting Diodes) are more efficient than traditional H.I.D. (High Intensity Discharge) light sources consuming as much as 75% less energy.

H.I.D. Light sources (Metal Halide and High Pressure Sodium) are rated at 10,000 to 20,000 hours useful life. LED's are rated up to 80,000 hours providing much lower maintenance costs.

LED fixtures providing better energy efficiency and a better quality of useable light.



Vega QVA With Extruded Aluminum Arm

#### Specifications

**Housing:** Heavy duty die-cast aluminum housing and lens frame with "C" channel gasket, 1/2" coin plugs with "O" rings for optional photocell. 6" Extruded aluminum or 7" 0°-90° adjustable 2-3/8" slip-fitter arm. Powder coated finish. See finish note.

**Lens:** Clear high impact prismatic borosilicate glass sealed to lens frame.


**Reflector:** Anodized aluminum, computer designed with LED array for efficiency and wide distribution.

**Light Source:** Super bright white 25W, 50W or 90W LED array with cast aluminum heat sink 3500K or 4900K color temp. 120V—277V LED driver.

**Finish:** Bronze, White or Black detergent cleaned, prime coated chip resistant powder urethane polyester coating. Contact factory for other colors.

**Photometric Information:** Contact factory.


**Labels:** U/L, CUL listed suitable for wet location.

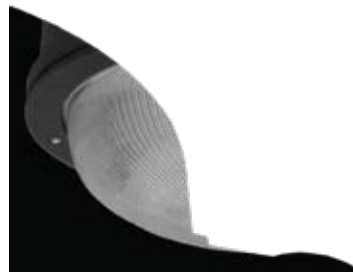

Vega QVS With 2-3/8" Adjustable Slip-Fitter Arm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

#### Dimensions

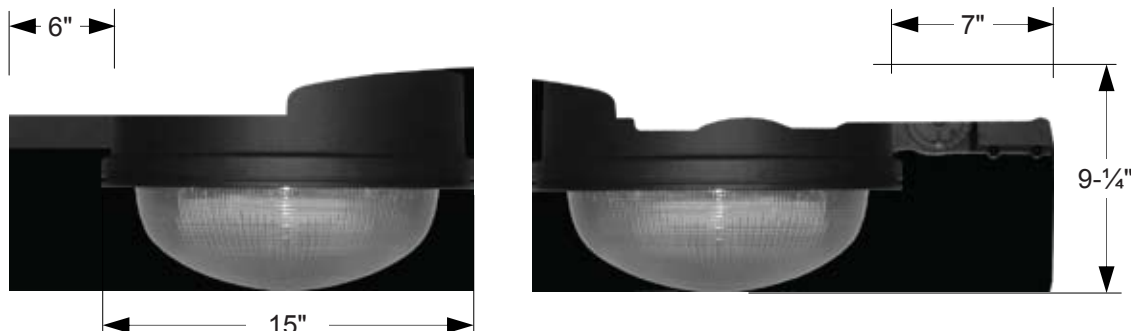

## Vega LED Series

### Design QV Arm Mount Luminaire

25 Watt, 50 Watt or 90 Watt Super Bright White LED  
With Prismatic Borosilicate Glass Lens  
Up To 150,000 Hour Average Rated Life

## Contact Factory For Photometric Information

### Ordering Information

| Catalog Number                                     | Watts | Light Source     |
|--|-------|------------------|
| <b>6" Extruded Aluminum Arm</b>                    |       |                  |
| QVA25L   | 25    | Super Bright LED |
| QVA50L   | 50    | Super Bright LED |
| QVA90L   | 90    | Super Bright LED |
| <b>7" 0°-90° 2-3/8" Adjustable Slip-Fitter Arm</b> |       |                  |
| QVS25L   | 25    | Super Bright LED |
| QVS50L   | 50    | Super Bright LED |
| QVS90L   | 90    | Super Bright LED |

### Options



House side  
shield lens  
frame option  
order catalog  
number:  
**QVHHS**

Photocell option  
order catalog  
number:  
**QVPC(voltage)**